


TWO POST LIFT

AMGO® Hydraulics
The Manufacturing Powerhouse

SPECIFICATIONS

| Model | | OHX-10 | OHX-10H |
|-----------------------|---|------------------------------------|------------------------------------|
| Lifting Capacity | | 10,000lbs (4500kg) | 10,000lbs (4500kg) |
| Lifting Time | | 57S | 63S |
| Lifting Height | A | 71 1/2" ~ 80 1/2" (1815~2044mm) | 78 3/4"~87 3/4" (2000~2229mm) |
| Overall Height | B | 144" (3658mm) | 157"~168" (3988~4267mm) |
| Overall Width | C | 135"/140 7/8" (3428/3578mm) | 135"/140 7/8" (3428/3578mm) |
| Drive-Thru Clearance | D | 99 1/2"/105 1/2" (2528/2678mm) | 99 1/2"/105 1/2" (2528/2678mm) |
| Width Between Columns | E | 112 1/4"/118 1/8" (2850/3000mm) | 112 1/4"/118 1/8" (2850/3000mm) |
| Minimum Pad Height | F | 3 1/2"(90mm) | 3 1/2"(90mm) |
| Motor | | 2.0HP, 220V/60Hz, single phase | |
| Gross Weight | | 1,620lbs(735kg) | 1,744lbs(791kg) |

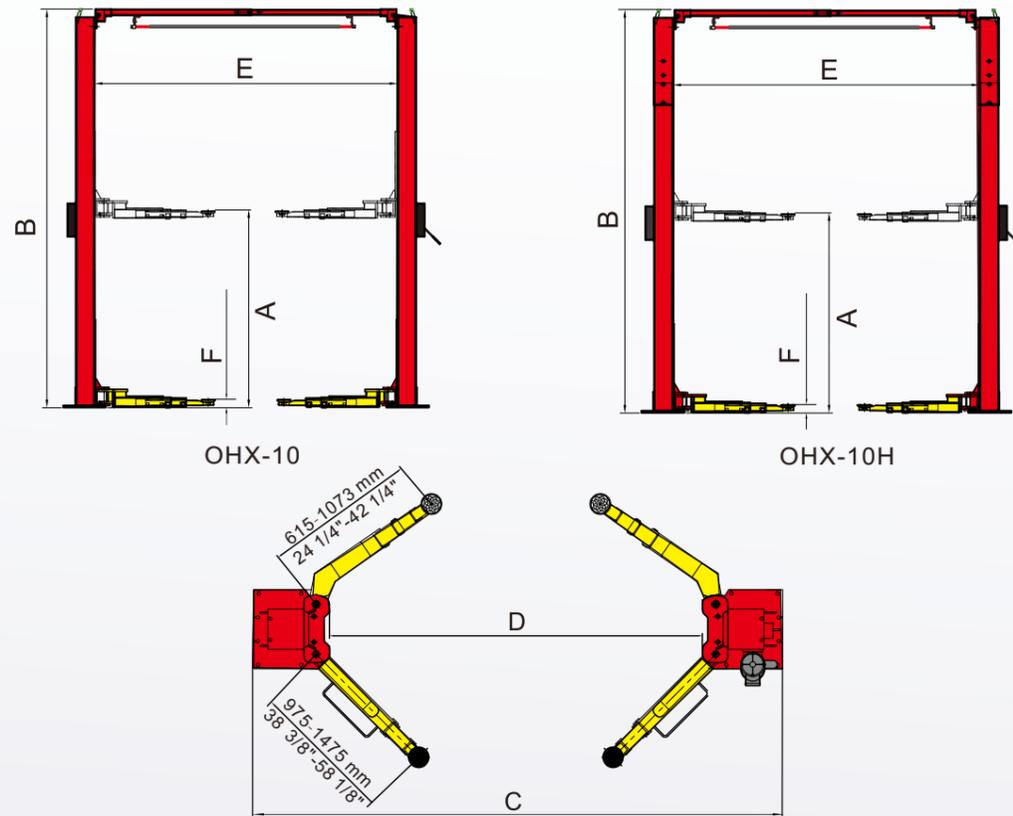

TWO POST SUPER ASYMMETRIC LIFT

With extremely long carriages, direct drive cylinders and advance features.



OHX-10

OHX-10H

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel: (803) 505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA

AMGO® Hydraulics
We're More Than a Manufacturer. We Are the
Leader in Innovation, Technology and Service
www.amgohyd.com

TWO-POST SUPER ASYMMETRIC LIFT

The professional lifts model OHX Series are designed with asymmetric arms but also can be configured with symmetric, Height & Width adjustment, fitting for low ceiling height (model OHX-10) and high ceiling but with extremely high lifting (model OHX-10H).

- √ 10,000 lbs capacity.
- √ Dual hydraulic cylinders, designed and made on high standard, high quality seals.
- √ Super Asymmetric arms allow to load different vehicles in an asymmetric or symmetric configuration.
- √ 3/8" aircraft quality cable is used for synchronization.
- √ Self-lubricating UHMW Polyethylene sliders and bronze bush.
- √ Single-point safety release, and dual safety design.
- √ Clearfloor design, provide unobstructed floor space.
- √ Overhead safety stop device.
- √ Automatic arm restraints keep the arms locked in their proper positions.
- √ Adjustable heights for OHX-10H.
- √ Stackable adapters 1.5", 2.5", 5" as standard.
- √ Detachable foot guard and tool tray.

FEATURES



• Single Point safety release makes it easy for the operator to unlock both column locks from one column.



• The top beam is designed with adjustment to fit different width demand. Overhead safety shut-off device prevents vehicle damages.



• Optional Width Extension Kits With these kits the width between posts is adjusted from 2850mm(112-1/4") to 3000mm(118-1/8")
Kits No.: 21004(OHX-10)
Kits No.: 21005(OHX-10H).



• Optional LED lights for all two post lifts
Clear floor two post lift LED light,
Kits No.:20101
plus extension cable 20103.



• Optional Saddle adaptors
Perfect choice for wide size SUV vehicles and light trucks.
Kits No.:20802.



The extremely long carriages is to reduce the force to columns. In other word, it is durable and reliable!

The carriages is two times or more longer than other products in the market.



Lifting arm lock automatic release device, high strength gear rack, more stable and safer.



Super-Asymmetric arms

Super asymmetric arms allow you to load different vehicles in an asymmetric or symmetric configuration. Self-lubricating UHMW polyethylene sliders, rubber door guards to protect your vehicle.



Extension adapters

With three different sizes of stackable adapters to adjust the height of rubber pad freely.

ASYMMETRIC DESIGN ARMS, OPEN-DOOR CLEARANCE

The OHX series lift features our innovative super asymmetric technology providing the versatility to lift vehicles both symmetrically and asymmetrically upon demand.

The warranty time of the lifts:
5 years for steel construction,
3 years for hydraulic parts,
2 years for electrical components.