


SPECIFICATIONS

Model		PRO-12	PRO-12A	PRO-12AX
Lifting Capacity		12,000lbs(5500kg)	12,000lbs(5500kg)	12,000lbs(5500kg)
Lifting Time		63S	63S	63S
Overall Length(Inc Ramps)	A	236 5/8" (6012mm)	236 5/8" (6012mm)	236 5/8" (6012mm)
Overall Length(No Inc. Ramps)	B	200 3/4" (5100mm)	200 3/4" (5100mm)	200 3/4" (5100mm)
Overall Width	C	126 1/4" (3208mm)	126 1/4" (3208mm)	132 1/8" (3356mm)
Width Between Posts	D	112 1/4" (2852mm)	112 1/4" (2852mm)	118 1/8" (3000mm)
Max. Lifting Height	E	73 1/2" (1865mm)	75 3/8" (1915mm)	75 3/8" (1915mm)
Overall Height	F	86" (2185mm)	86" (2185mm)	86" (2185mm)
Minimum Height	G	6 5/8" (170mm)	8 5/8" (220mm)	8 5/8" (220mm)
Max. Underneath Height	H	67 7/8"(1724mm)	67 7/8"(1724mm)	67 7/8"(1724mm)
Drive-Thru Clearance	I	98 3/8"(2498mm)	98 3/8"(2498mm)	104 1/8"(2646mm)
Width Between Runways	J	43 1/4"(1100mm) Max.51 1/8"(1300mm)	43 1/4"(1100mm) Max.51 1/8"(1300mm)	43 1/4"(1100mm) Max.53 3/4"(1365mm)
Outside Edge of Runways	K	83 1/4"(2116mm) Max.91 1/8"(2316mm)	83 1/4"(2116mm) Max.91 1/8"(2316mm)	83 1/4"(2116mm) Max.93 3/4"(2381mm)
Min. Four Wheel Align	L	/	78 3/4"(2000mm)	78 3/4"(2000mm)
Max. Four Wheel Align	M	/	155 7/8"(3960mm)	155 7/8"(3960mm)
Max. Two Wheel Align	N	/	161 3/8"(4100mm)	161 3/8"(4100mm)
Motor		2,319lbs(1052kg)	2,901lbs(1316kg)	2,919lbs(1324kg)
Gross Weight		2.0HP,220V/60Hz,single phase		

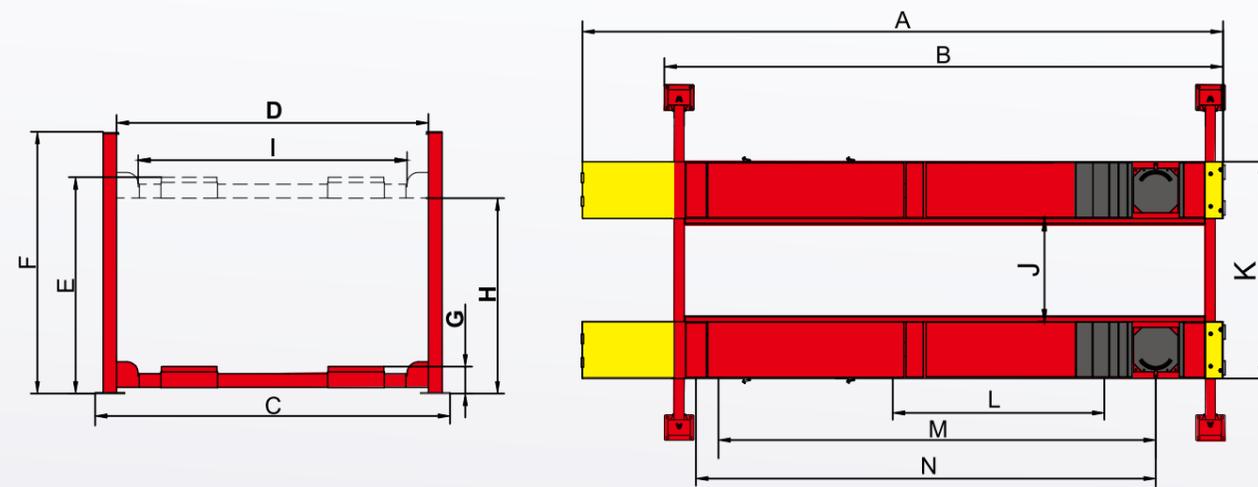

FOUR POST
COMMERCIAL LIFT

The perfect choice with the combination of performance and reliability for your commercial service.



Optional Rolling Jack

J6H: manual hydraulic type 6,000lbs(2,800kg)
J6A: pneumatic hydraulic type 6,000lbs(2,800kg).


FOUR POST COMMERCIAL LIFT

With great performance, this is the perfect lift to meet the needs of garage and shop owners.


- ✓ 12,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards using high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed.;
- ✓ Adjustable lifting platform: Off-side platform can be adjusts the mounting position left or right as required. The standard distance between two platforms is 43 1/4"(1100mm) and maximum distance is 51 1/8"(1300mm)(pro-12,pro-12A) 53 3/4"(1365mm)(pro-12AX).
- ✓ Optional Rolling Jacks:
J6H 6,000lbs manual pump;
J6A 6,000lbs pneumatic pump;
- ✓ More choices:
Optional led lights Kits No.: 40103;
Optional extension Kits No.: 41203;
Optional air line Kits No.: 40102.



FEATURES

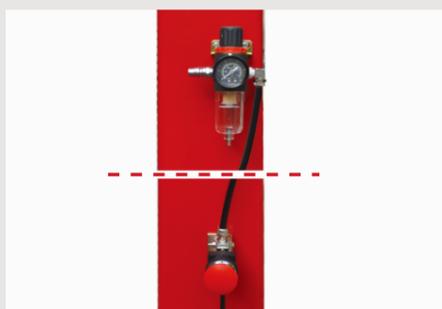

• Air controlled safety device.

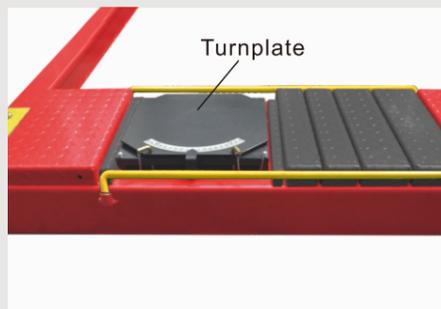


• Adjustable turnplates blocks for the PRO-12A. Optional turnplate. Kits No.: 40101



• New rear-slip ball sets. Optional LED light kits is fitted for every model of AMGO 4-post lifts. LED Kits No.:40103.



• Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories. Kits No.:40102

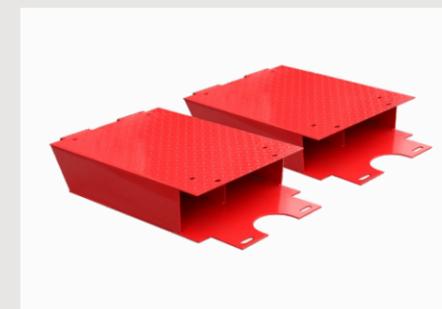

• Optional length extension kits adds an extra 26" (660mm) length to the platform. Kits No.: 41203.



• Optional adjustable blocks for alignment 4 post lift. Kits No.: 40905 (used with kits 41203)