


SPECIFICATIONS

Model		PRO-12SX	PRO-12ASX
Lifting Capacity		12,000lbs(5500kg)	12,000lbs(5500kg)
Lifting Time		45S	45S
Overall Length(Inc Ramps)	A	232 5/8" (5910mm)	232 5/8" (5910mm)
Overall Length(No Inc. Ramps)	B	196 3/4" (4998mm)	196 3/4" (4998mm)
Overall Width	C	132 1/8" (3356mm)	132 1/8" (3356mm)
Width Between Posts	D	118 1/8" (3000mm)	118 1/8" (3000mm)
Max. Lifting Height	E	73 1/2" (1865mm)	75 3/8" (1915mm)
Overall Height	F	86" (2185mm)	86" (2185mm)
Minimum Height	G	6 5/8" (170mm)	8 5/8" (220mm)
Max. Underneath Height	H	67 7/8"(1724mm)	67 7/8"(1724mm)
Drive-Thru Clearance	I	104 1/8"(2646mm)	104 1/8"(2646mm)
Width Between Runways	J	43 1/4"(1100mm) Max.53 3/4"(1365mm)	43 1/4"(1100mm) Max.53 3/4"(1365mm)
Outside Edge of Runways	K	83 1/4"(2116mm) Max.93 3/4"(2381mm)	83 1/4"(2116mm) Max.93 3/4"(2381mm)
Min. Four Wheel Align	L	/	81 7/8"(2080mm)
Max. Four Wheel Align	M	/	151 5/8"(3850mm)
Max. Two Wheel Align	N	/	157 1/2"(4000mm)
Motor		2,255 lbs(1023kg)	2,798 lbs(1269kg)
Gross Weight		2.0HP,220V/60Hz,single phase	

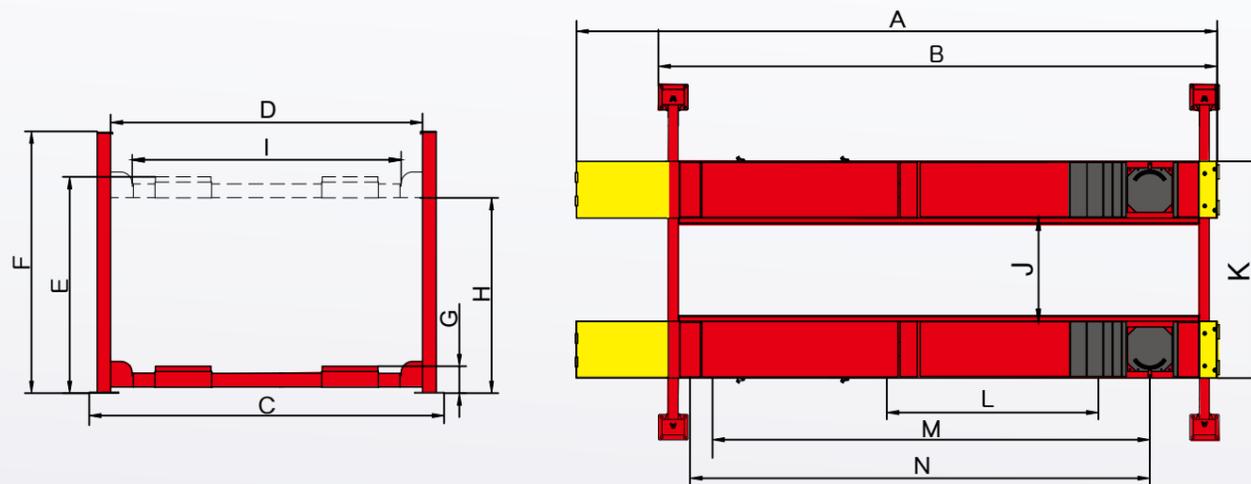

FOUR POST
COMMERCIAL LIFT

With great performance, this is the perfect lift to meet the needs of garage and shop owners.



PRO-12SX

PRO-12ASX

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA



We're More Than a Manufacturer. We Are the Leader in Innovation, Technology and Service

www.amgohyd.com


FOUR POST COMMERCIAL LIFT

The PRO-12SX & PRO-12ASX are the wider Four Post Lifts with the same advance features as AMGO other products.


- ✓ 12,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards using high quality seals;
- ✓ Adjustable lifting platform: Off-side platform can adjust the mounting position left or right as required. The standard distance between two platforms is 43 1/4"(1100mm) and maximum distance is 53 3/4"(1365mm);
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed.
- ✓ Optional Rolling Jacks:
 - J6H 6,000lbs manual control;
 - J6A 6,000lbs pneumatic pump;
- ✓ More choices:
 - Optional led lights Kits No. 40103;
 - Optional extension Kits No. 40903;
 - Optional air line Kits No. 40102.



FEATURES

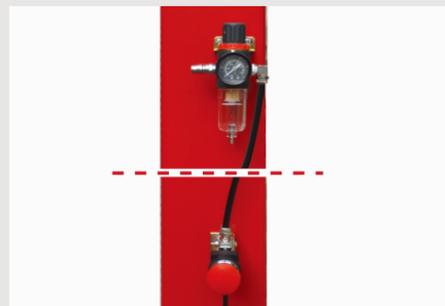


- Air controlled safety device.

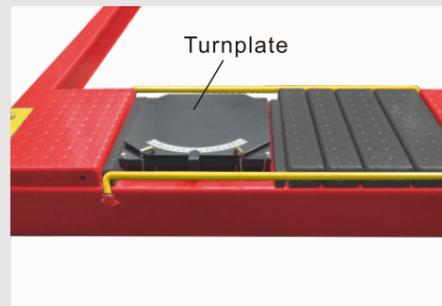

- Adjustable turnplates blocks for the PRO-12ASX.
Optional turnplate. Kits No.: 40101



- Optional LED lighting.
Kits No.:40103

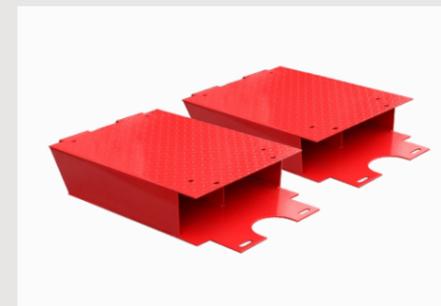

- Optional length extension kits adds an extra 26" (660mm) length to the platform.
Kits No.: 40903



- Optional adjustable blocks for alignment 4 post lift.
Kits No.: 40905 (used with kits 40903)



- Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories. Kits No.:40102