


SPECIFICATIONS

Model		PRO-14	PRO-14A	PRO-14E	PRO-14AE
Lifting Capacity		14,000lbs(6500kg)	14,000lbs(6500kg)	14,000lbs(6500kg)	14,000lbs(6500kg)
Lifting Time		76S	76S	76S	76S
Overall Length(Inc Ramps)	A	257 1/2" (6541mm)	257" (6528mm)	286 " (7265mm)	285 1/2" (7252mm)
Overall Length(No Inc. Ramps)	B	216 1/2" (5500mm)	216 1/2" (5500mm)	245" (6224mm)	245" (6224mm)
Overall Width	C	130 7/8" (3324mm)	130 7/8" (3324mm)	130 7/8" (3324mm)	130 7/8" (3324mm)
Width Between Posts	D	116" (2946mm)	116" (2946mm)	116" (2946mm)	116" (2946mm)
Max. Lifting Height	E	73 1/2" (1865mm)	75 3/8" (1915mm)	73 1/2" (1865mm)	75 3/8" (1915mm)
Overall Height	F	86" (2185mm)	86" (2185mm)	86" (2185mm)	86" (2185mm)
Minimum Height	G	7 7/8" (200mm)	9 7/8" (250mm)	7 7/8" (200mm)	9 7/8" (250mm)
Max. Underneath Height	H	66 3/4"(1695mm)	66 3/4"(1695mm)	66 3/4"(1695mm)	66 3/4"(1695mm)
Drive-Thru Clearance	I	102 1/8"(2592mm)	102 1/8"(2592mm)	102 1/8"(2592mm)	102 1/8"(2592mm)
Width Between Runways	J	47"(1194mm) Max.54 1/2"(1385mm)	47"(1194mm) Max.54 1/2"(1385mm)	47"(1194mm) Max.54 1/2"(1385mm)	47"(1194mm) Max.54 1/2"(1385mm)
Outside Edge of Runways	K	87"(2210mm) Max.94 1/2"(2401mm)	87"(2210mm) Max.94 1/2"(2401mm)	87"(2210mm) Max.94 1/2"(2401mm)	87"(2210mm) Max.94 1/2"(2401mm)
Min. Four Wheel Align	L	/	92 1/2"(2350mm)	/	92 1/2"(2350mm)
Max. Four Wheel Align	M	/	169 5/8"(4310mm)	/	169 5/8"(4310mm)
Max. Two Wheel Align	N	/	175 1/4"(4450mm)	/	203 1/2"(5170mm)
Motor		2,791lbs(1266kg)	3,399lbs(1542kg)	2,945lbs(1336kg)	3,576lbs(1622kg)
Gross Weight		2.0HP,220V/60Hz,single phase			

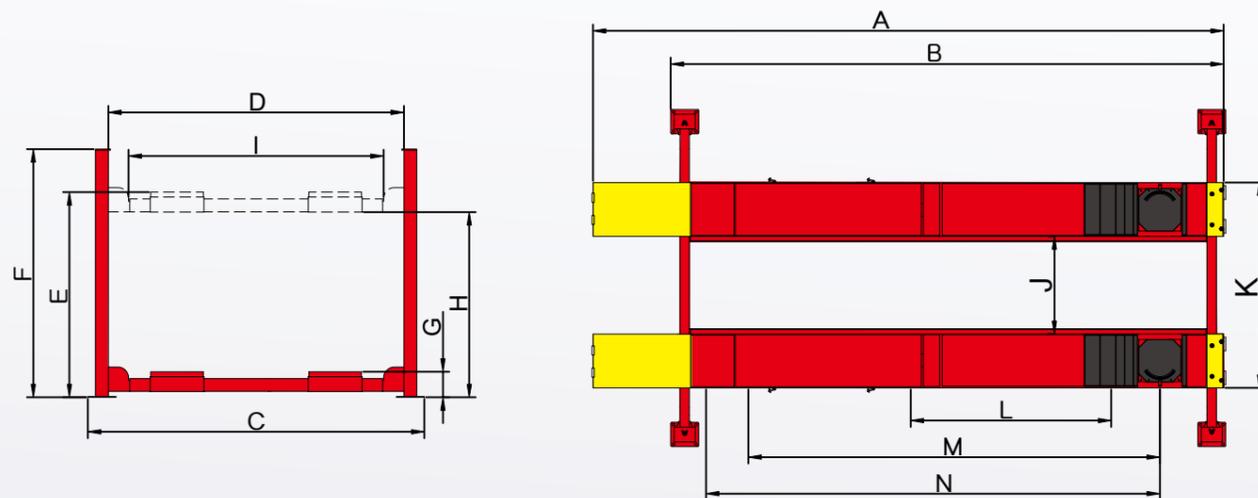

FOUR POST
COMMERCIAL LIFT

AMGO heavy-duty four post lifts are best choice for heavy duty vehicles or trucks in commercial shops... stronger and faster! .



Optional Rolling Jack
RJ-8A: pneumatic hydraulic type 8,000lbs(3,500kg)

PRO-14
PRO-14E
PRO-14A
PRO-14AE

AMGO HYDRAULIC CORPORATION


SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA

FOUR POST COMMERCIAL LIFT

AMGO powerful 4-post lift provides a 14,000 lbs lifting capacity and features extra wide runways to accommodate a wide variety of vehicle types and wheel bases.

- ✓ 14,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards with high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed;
- ✓ Adjustable lifting platform: Off-side platform can adjust the mounting position left or right as required. The standard distance between two platforms is 47"(1194mm) and maximum distance is 54 1/2"(1385mm)
- ✓ Optional Rolling Jacks:
 - RJ-8A: pneumatic hydraulic type 8,000lbs(3,500kg);
- ✓ More choices:
 - Optional led lights Kits No.: 40103
 - Optional extension Kits No.: 41403;
 - Optional air line Kits No.: 40102.

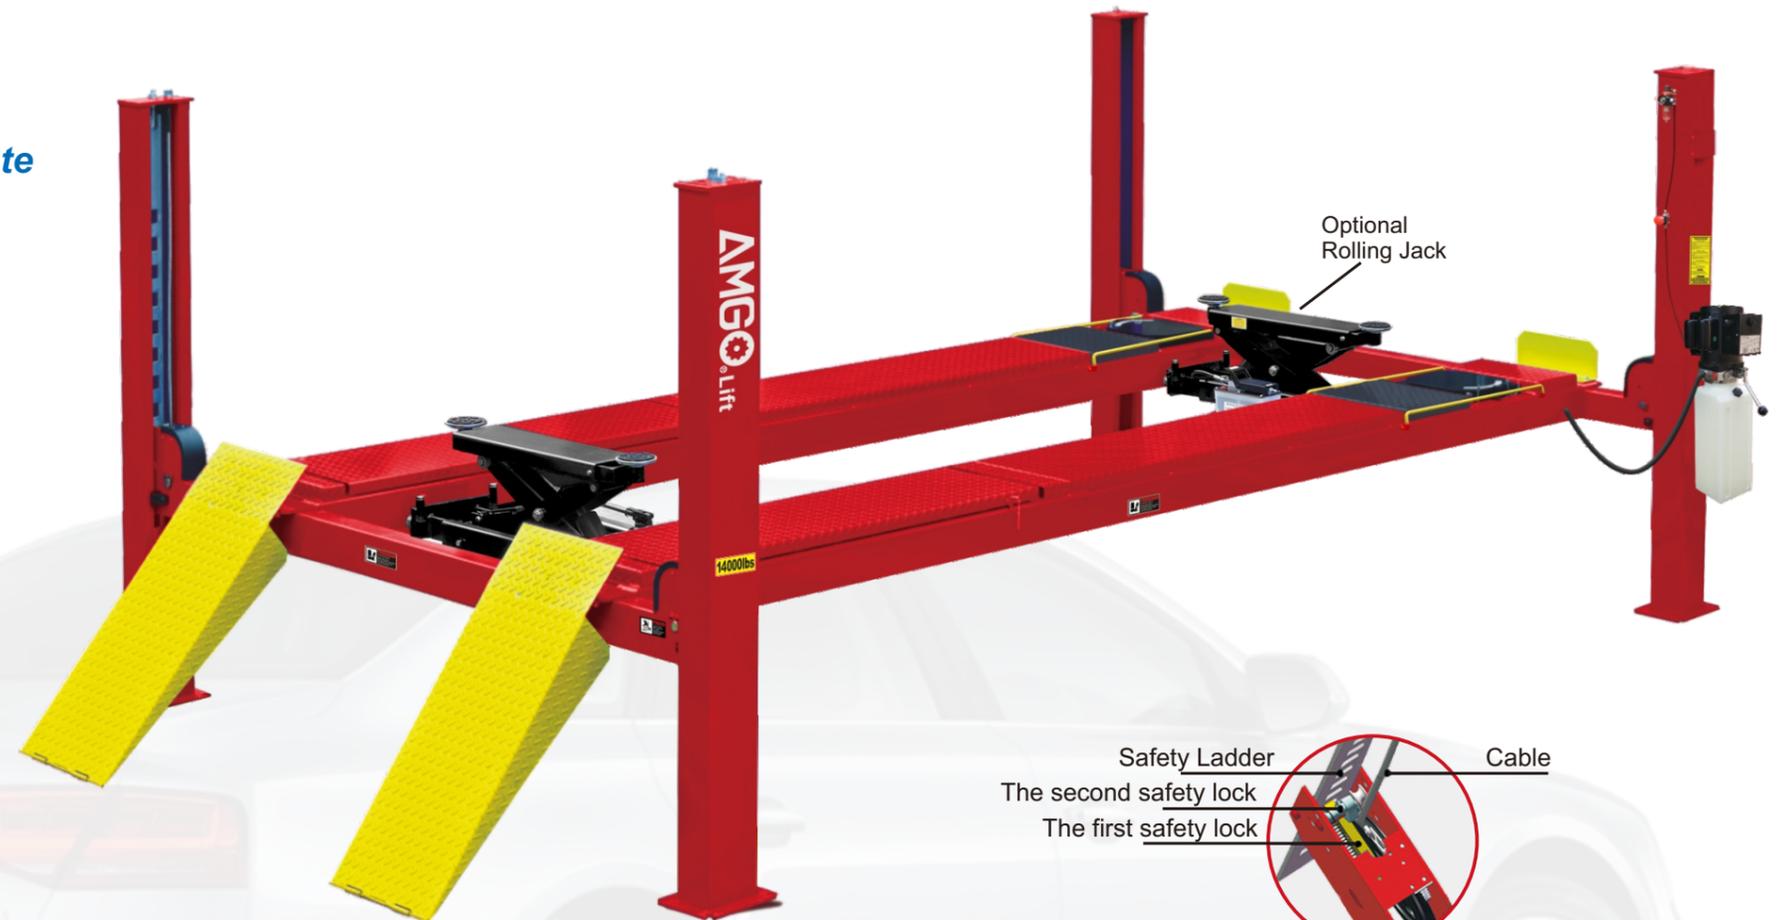


Safety Ladder
Cable
The second safety lock
The first safety lock
Double-safety locks

FEATURES



• Air controlled safety device.

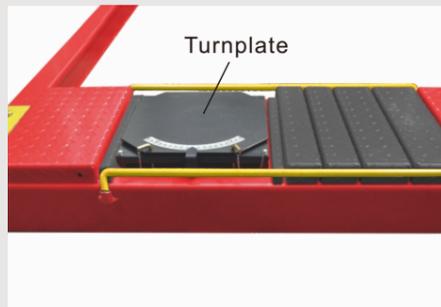


• Adjustable turnplate blocks for the PRO-14A, PRO-14AE.
Optional turnplate. Kits No.: 40101



• New rear-slip ball sets.
Optional LED light kits is fitted for every model of AMGO 4-post lifts.
LED Kits No.:40103



• Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories. Kits No.:40102

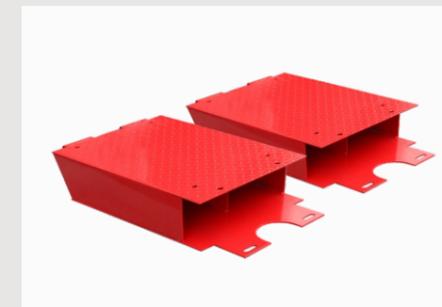

• Optional length extension kits adds an extra 26" (660mm) length to the platform.
Kits No.: 41403.



• Optional adjustable blocks for alignment 4 post lift.
Kits No.: 40905 (used with kits 41403)