


SPECIFICATIONS

Model		PRO-18	PRO-18A
Lifting Capacity		18,000lbs(8000kg)	18,000lbs(8000kg)
Lifting Time		118S	118S
Overall Length(Inc Ramps)	A	293 1/4" (7449mm)	292 3/4" (7436mm)
Overall Length(No Inc. Ramps)	B	252 1/4" (6408mm)	252 1/4" (6408mm)
Overall Width	C	137 1/8" (3482mm)	137 1/8" (3482mm)
Width Between Posts	D	122 3/8" (3108mm)	122 3/8" (3108mm)
Max. Lifting Height	E	73 1/2" (1865mm)	75 3/8" (1915mm)
Overall Height	F	86" (2185mm)	86" (2185mm)
Minimum Height	G	7 7/8" (200mm)	9 7/8" (250mm)
Max. Underneath Height	H	66 5/8"(1692mm)	66 5/8"(1692mm)
Drive-Thru Clearance	I	108 1/4"(2750mm)	108 1/4"(2750mm)
Width Between Runways	J	51 1/4" (1302mm)	51 1/4" (1302mm)
Outside Edge of Runways	K	95 1/4"(2418mm)	95 1/4"(2418mm)
Min. Four Wheel Align	L	/	99 5/8"(2530mm)
Max. Four Wheel Align	M	/	182 5/8"(4640mm)
Max. Two Wheel Align	N	/	209 1/8"(5310mm)
Motor		3,483lbs(1580kg)	4,429lbs(2009kg)
Gross Weight		2.0HP,220V/60Hz,single phase	

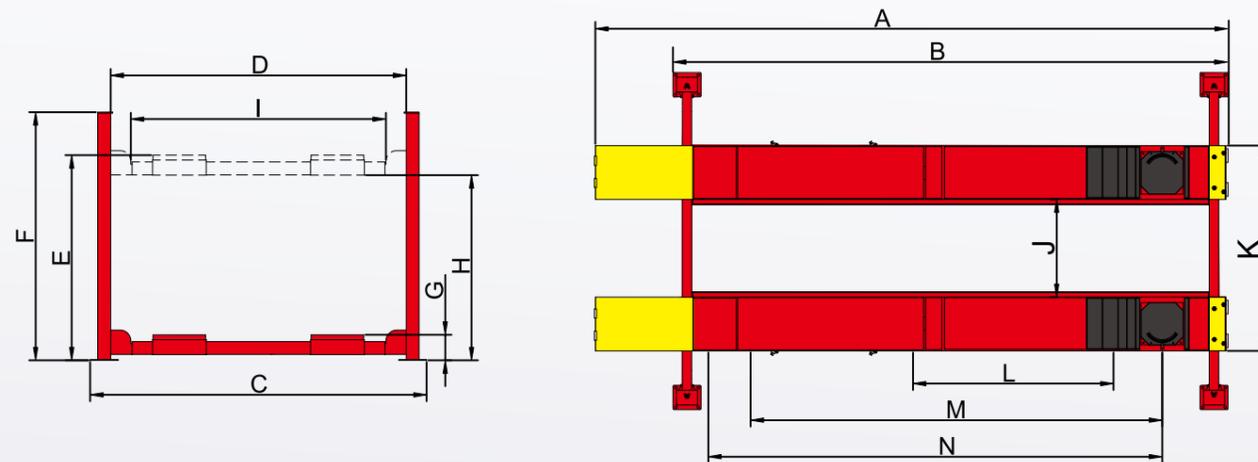

FOUR POST
TRUCK LIFT

AMGO's Heavy Duty Truck Lifts are newly engineered lifts that makes light work out of heavy lifting.



PRO-18

PRO-18A

AMGO HYDRAULIC CORPORATION


SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA


FOUR POST TRUCK LIFT

AMGO's powerful four-post models provide a 18,000 lbs lifting capacity and feature extra wide runways to accommodate a wide variety of vehicle types. With a double locking safety device, heavy duty design and built to latest manufacturing technology, these lifts are more superior in the competitive lift market.


- ✓ 18,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Ø1/2" aircraft quality cable;
- ✓ Adjustable turnplate blocks to fit various wheel bases on the PRO-18A;
- ✓ Integrated rear slip plates for the PRO-18A;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards with high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed;
- ✓ The width of platform is 558mm(22") and width between two platforms are 1302mm(51 1/4").
- ✓ Optional Rolling Jacks:
RJ-10A 10,000lbs capacity with pneumatic pump.

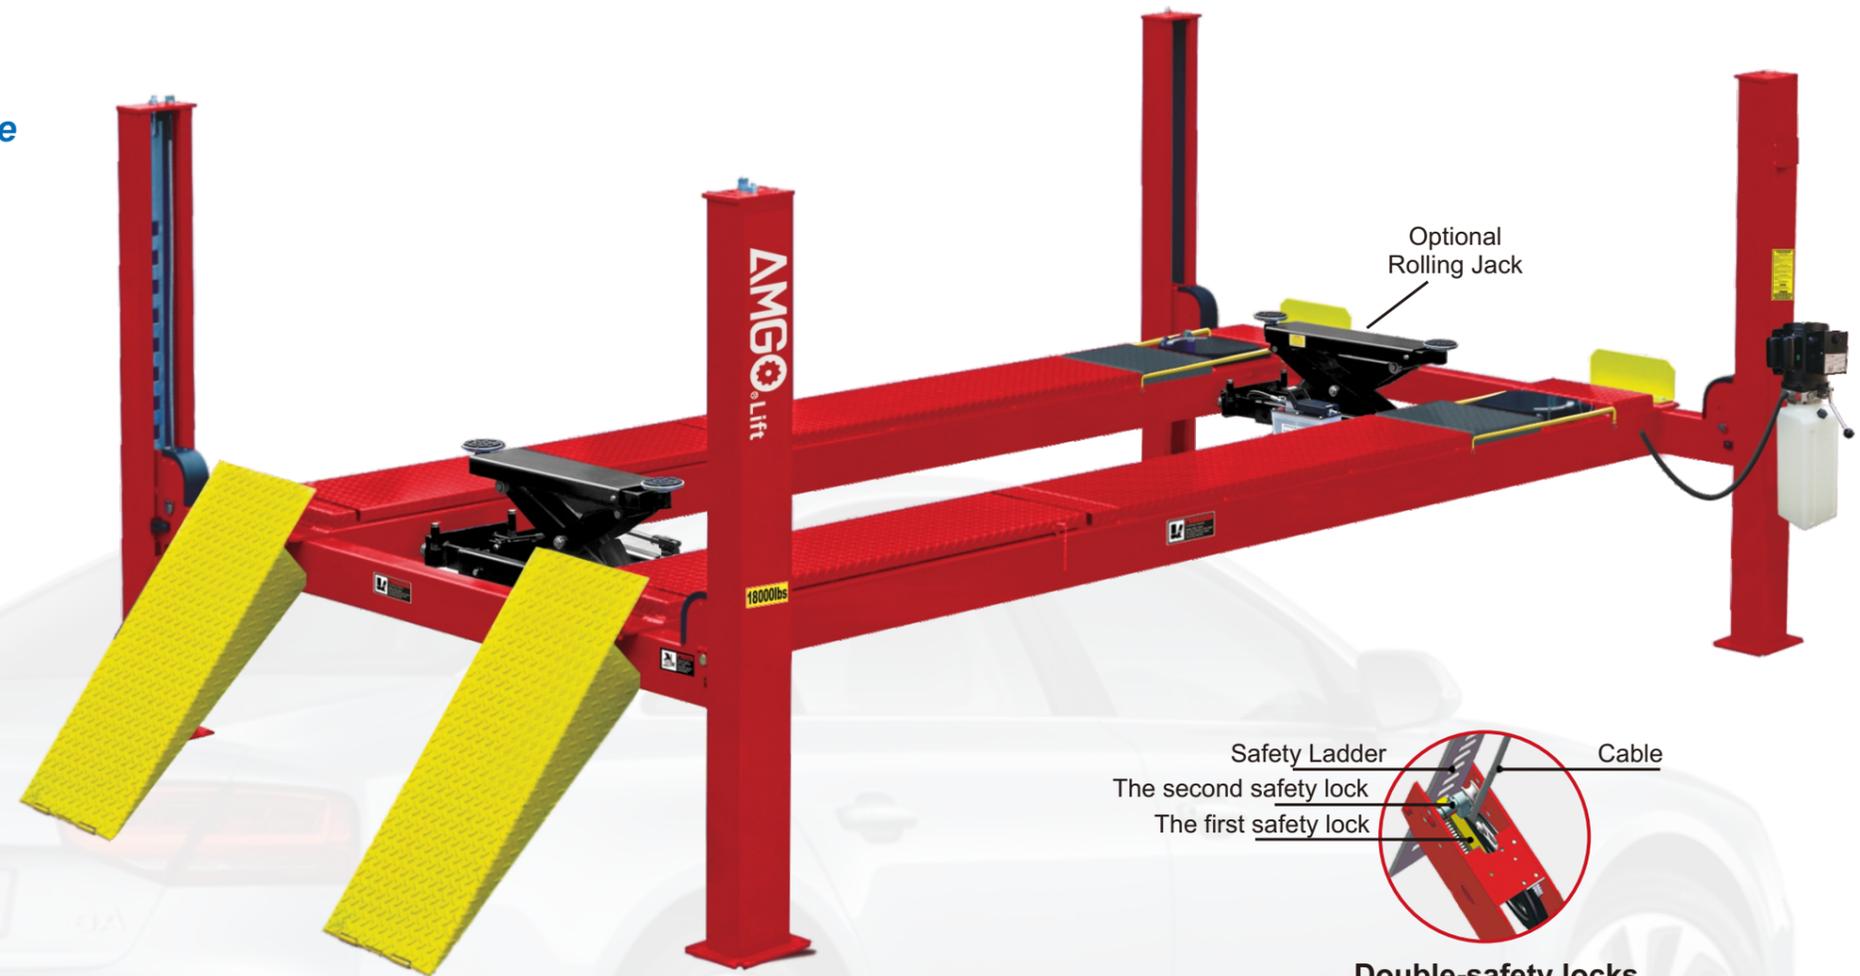

FEATURES

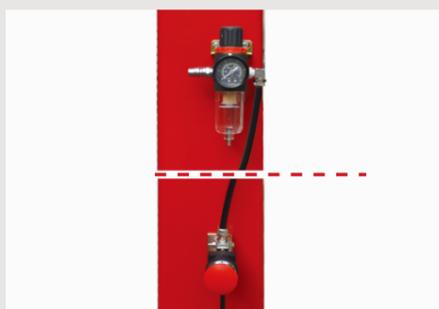

• Air controlled safety device.

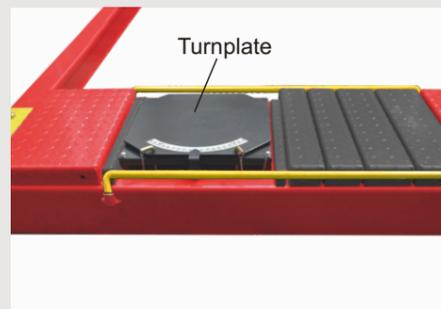


• Adjustable turnplates blocks for the PRO-18A. Optional turnplate. Kits No.: 40101



• New rear-slip ball sets. Optional LED light kits is fitted for every model of AMGO 4-post lifts. LED Kits No.:40103



• Optional airline kit. Easy to install for all models of rolling jacks with pneumatic pump accessories. Kits No.: 40102

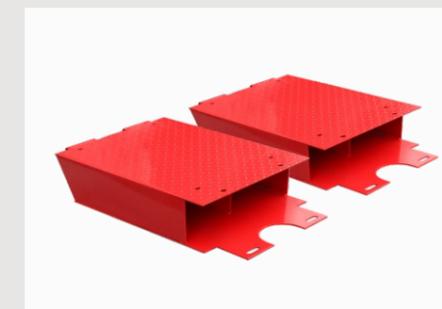

• Optional length extension kits adds an extra 29" (737mm) length to the platform. Kits No.: 41801



• Optional adjustable blocks for alignment 4 post lift. Kits No.: 41803 (used with kits 40801)