

FOUR POST LIFT


AMGO® Hydraulics
The Manufacturing Powerhouse

SPECIFICATIONS

Model	PRO-30	PRO-30E	PRO-40	PRO-40E
Lifting Capacity	30,000lbs	30,000lbs	40,000lbs	40,000lbs
Lifting Time	130S	130S	176S	176S
Overall Length(Inc Ramps)	A 307" (7800mm)	366 1/8" (9300mm)	366 1/8" (9300mm)	425 1/8" (10800mm)
Overall Length(No Inc. Ramps)	B 256 1/2" (6514mm)	315 1/2" (8014mm)	315 1/2" (8014mm)	374 1/2" (9514mm)
Overall Width	C 149 3/8" (3794mm)	149 3/8" (3794mm)	161 3/8" (4100mm)	161 3/8" (4100mm)
Width Between Posts	D 131 3/4" (3348mm)	131 3/4" (3348mm)	143 7/8" (3654mm)	143 7/8" (3654mm)
Max. Lifting Height	E 74 3/4" (1900mm)	74 3/4" (1900mm)	74 3/4" (1900mm)	74 3/4" (1900mm)
Overall Height	F 91 7/8" (2332mm)	91 7/8" (2332mm)	91 7/8" (2332mm)	91 7/8" (2332mm)
Minimum Height	G 10 1/2" (265mm)	10 1/2" (265mm)	10 1/2" (265mm)	10 1/2" (265mm)
Max. Underneath Height	H 65 7/8"(1674mm)	65 7/8"(1674mm)	65 7/8"(1674mm)	65 7/8"(1674mm)
Drive-Thru Clearance	I 117 3/4"(2992mm)	117 3/4"(2992mm)	129 7/8"(3298mm)	129 7/8"(3298mm)
Width Between Runways	J 54 3/4"(1390mm)	54 3/4"(1390mm)	58 7/8"(1496mm)	58 7/8"(1496mm)
Outside Edge of Runways	K 102 3/4"(2610mm)	102 3/4"(2610mm)	114 7/8"(2916mm)	114 7/8"(2916mm)
Gross Weight	5,401lbs(2450kg)	6,559lbs(2975kg)	8,283lbs(3757kg)	9,204lbs(4175kg)
Motor	2.0HP,220V/60Hz,single phase			

FOUR POST TRUCK LIFT

AMGO's Heavy Duty Truck Lifts are newly engineered lifts that makes light work out of heavy lifting.

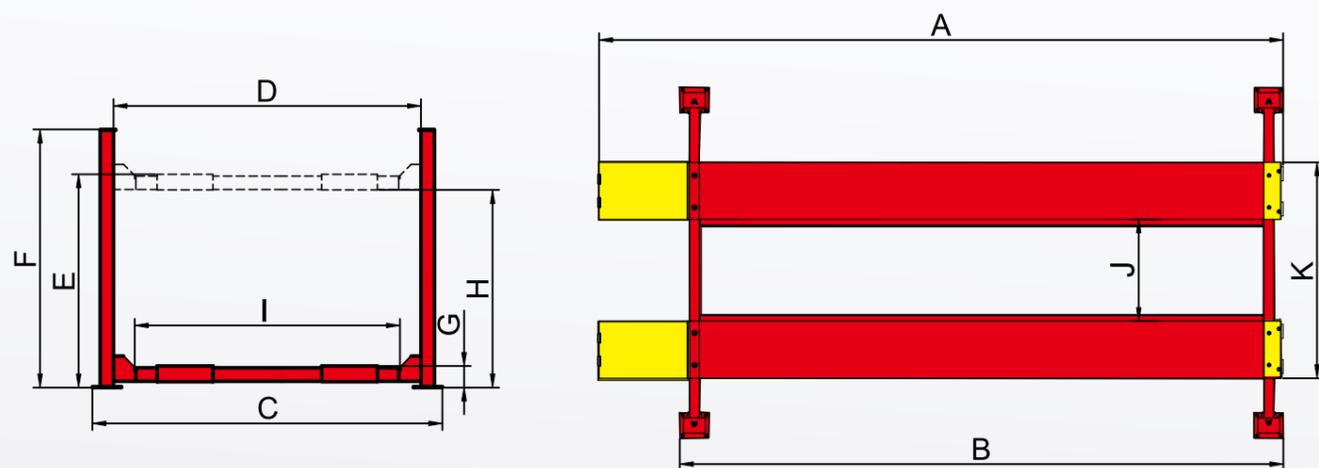

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA

AMGO® Hydraulics
We're More Than a Manufacturer. We Are the
Leader in Innovation, Technology and Service
www.amgohyd.com

PRO-30

PRO-30E

PRO-40

PRO-40E


FOUR POST TRUCK LIFT

AMGO's powerful four-post models provide a generous 30,000 - 40,000 lbs lifting capacity and features extra wide runways to accommodate a wide variety of vehicle types. With a double locking safety device, heavy duty design, built to last manufacturing technology, and over 6 ft of unrestricted under vehicle access

- ✓ 30,000 lbs & 40,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Ø3/4" aircraft quality synchronization cable;
- ✓ Non-slip platform;
- ✓ Hydraulic cylinders are designed to high standards using high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant speed;
- ✓ Optional Rolling Jacks:
RJ-20A 20,000lbs capacity with pneumatic pump;
- ✓ AMGO 5-3-2 Warranty.



FEATURES

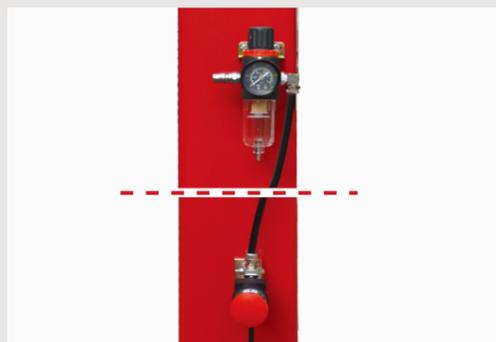


• Air controlled safety device.



• Optional Rolling Jacks:
RJ-20A 20,000lbs



• Optional LED lighting.
Kits No.: 40103

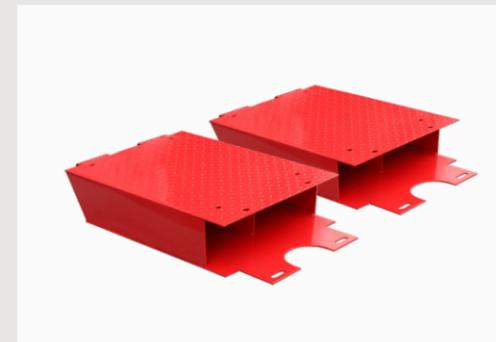

• Optional length extension kits adds an extra 29" (737mm) length on the platform.
Kits No.: 43001(PRO-30 only)



• Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories.
Kits No.: 40106